

Aspire - Herringbone

Luxury Vinyl Tile

**CARPET
LINE DIRECT**
LUXURY VINYL TILES & VINYL

Name	Standard	Click Result	Dryback Result
DIMENSIONS			
Thickness	EN 429	5.5mm	2.5mm
Length	EN 428	60cm	60cm
Width	EN 428	12.50cm	12.50cm
Weight	EN 430	8260 g/m ²	4630g/m ²
Bevel		4V	4V
TEST			
Anti-static Performance	EN 1815	< 2.05kV	<2.0kV
Impact Sound Insulation	EN 492-09	ICC=55	ICC-63
Sound Absorption	ISO 717-2	20dB	5dB
Thermal Resistance	BS 4745:2005 (2016) ISO 5085-1: 1989	Tog: 0.52	Tog: 0.15
Dynamic Friction	BS EN 13893:2002 (2018)	0.0417m ² K/W	0.0107m ² K/W
Flammability	BS EN 13501-1:2007 + A1:2009	B _{f1} - s1	B _{f1} - s1
Castor Chair Resistance	EN 12529	Yes Type W	Yes Type W
Slip Resistance	DIN 51130	Class R9 DS	Class R10
Usage Classification	EN 685	23 - Heavy Domestic 33 - Heavy Commercial Use 41 - Light Industrial Use	23 - Heavy Domestic 33 - Heavy Commercial Use 41 - Light Industrial Use
Chemical Resistance	EN 423	Not affected	Not affected
Wear Group	EN 660-1	T	T
Residual Indentation	EN 433	0.05mm	0.05mm
Light Stability	EN ISO 105-B02	Degree Level ≥ 6 Method A	Degree Level ≥ 6 Method A
Dimensional Stability	EN 434	≤ 0.1%	<0.1% <0.12%
CE Mark	EN14041	EN 14041:2001+AC:2005+AC:2006	EN 14041:2001+AC:2005+AC:2006
Underfloor Heating	EN1264-2	Suitable for underfloor heating. Maximum temperature 27°C	Suitable for underfloor heating. Maximum temperature 27°C
Phthalate Free	Our products are manufactured using both phthalate free and biobased plasticisers except for recycled content		



April 2026



Wear Layer



Natural Feel



Bevelled Edges



02 - Bleached Oak



04 - Charred Oak




06 - Smokehouse Oak



07 - Classical Oak



09 - Natural Oak

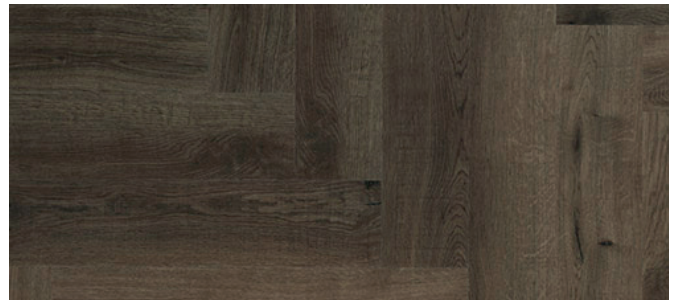

10 - Country Oak



09 - Natural Oak