

CLICK FIT LAMINATE FLOORING



Xpressions 8 Ville Herringbone


CLICK FIT LAMINATE FLOORING

Xpressions 8 Ville Herringbone

megaloc




Anti
Bacterial



Realistic
decor



PVC
free



Extremely
resistant



Embossed
in register



Water
resistant



GROOVE

4V groove

Carbon-negative
production based on
highly efficient
industrial
processes




Exclusive product-
design consistently
oriented
towards
recycling



Fully integrated
production-process
on 1 site




Choose from exclusive
designs and colours

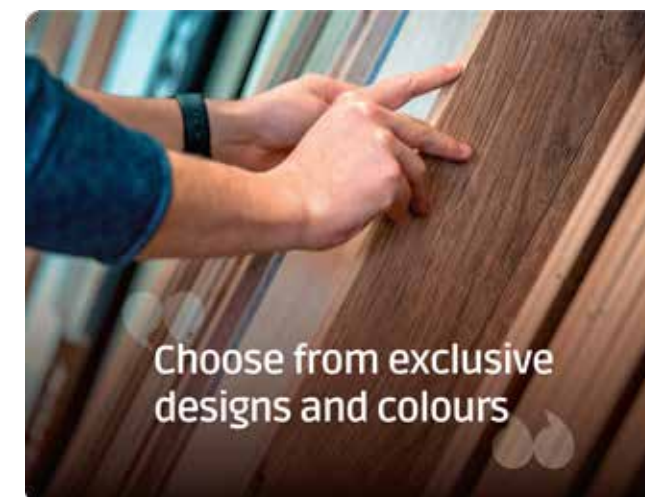



ROTTERDAM

44480-64111

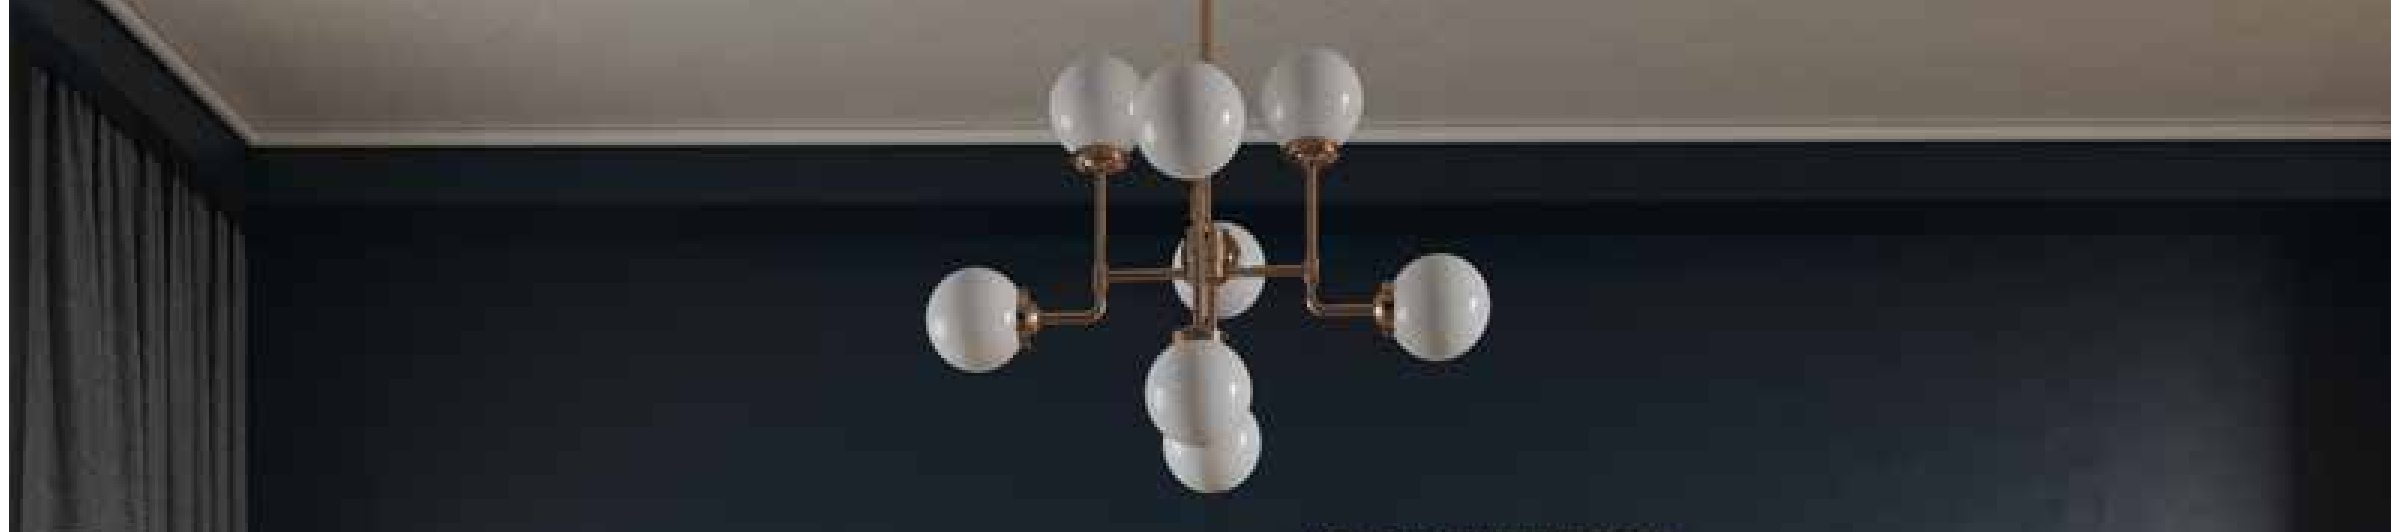

VALENCIA

44498-63274



GIRONA

44496-65338




NAPLES

44492-66702



VENICE

44494-63279

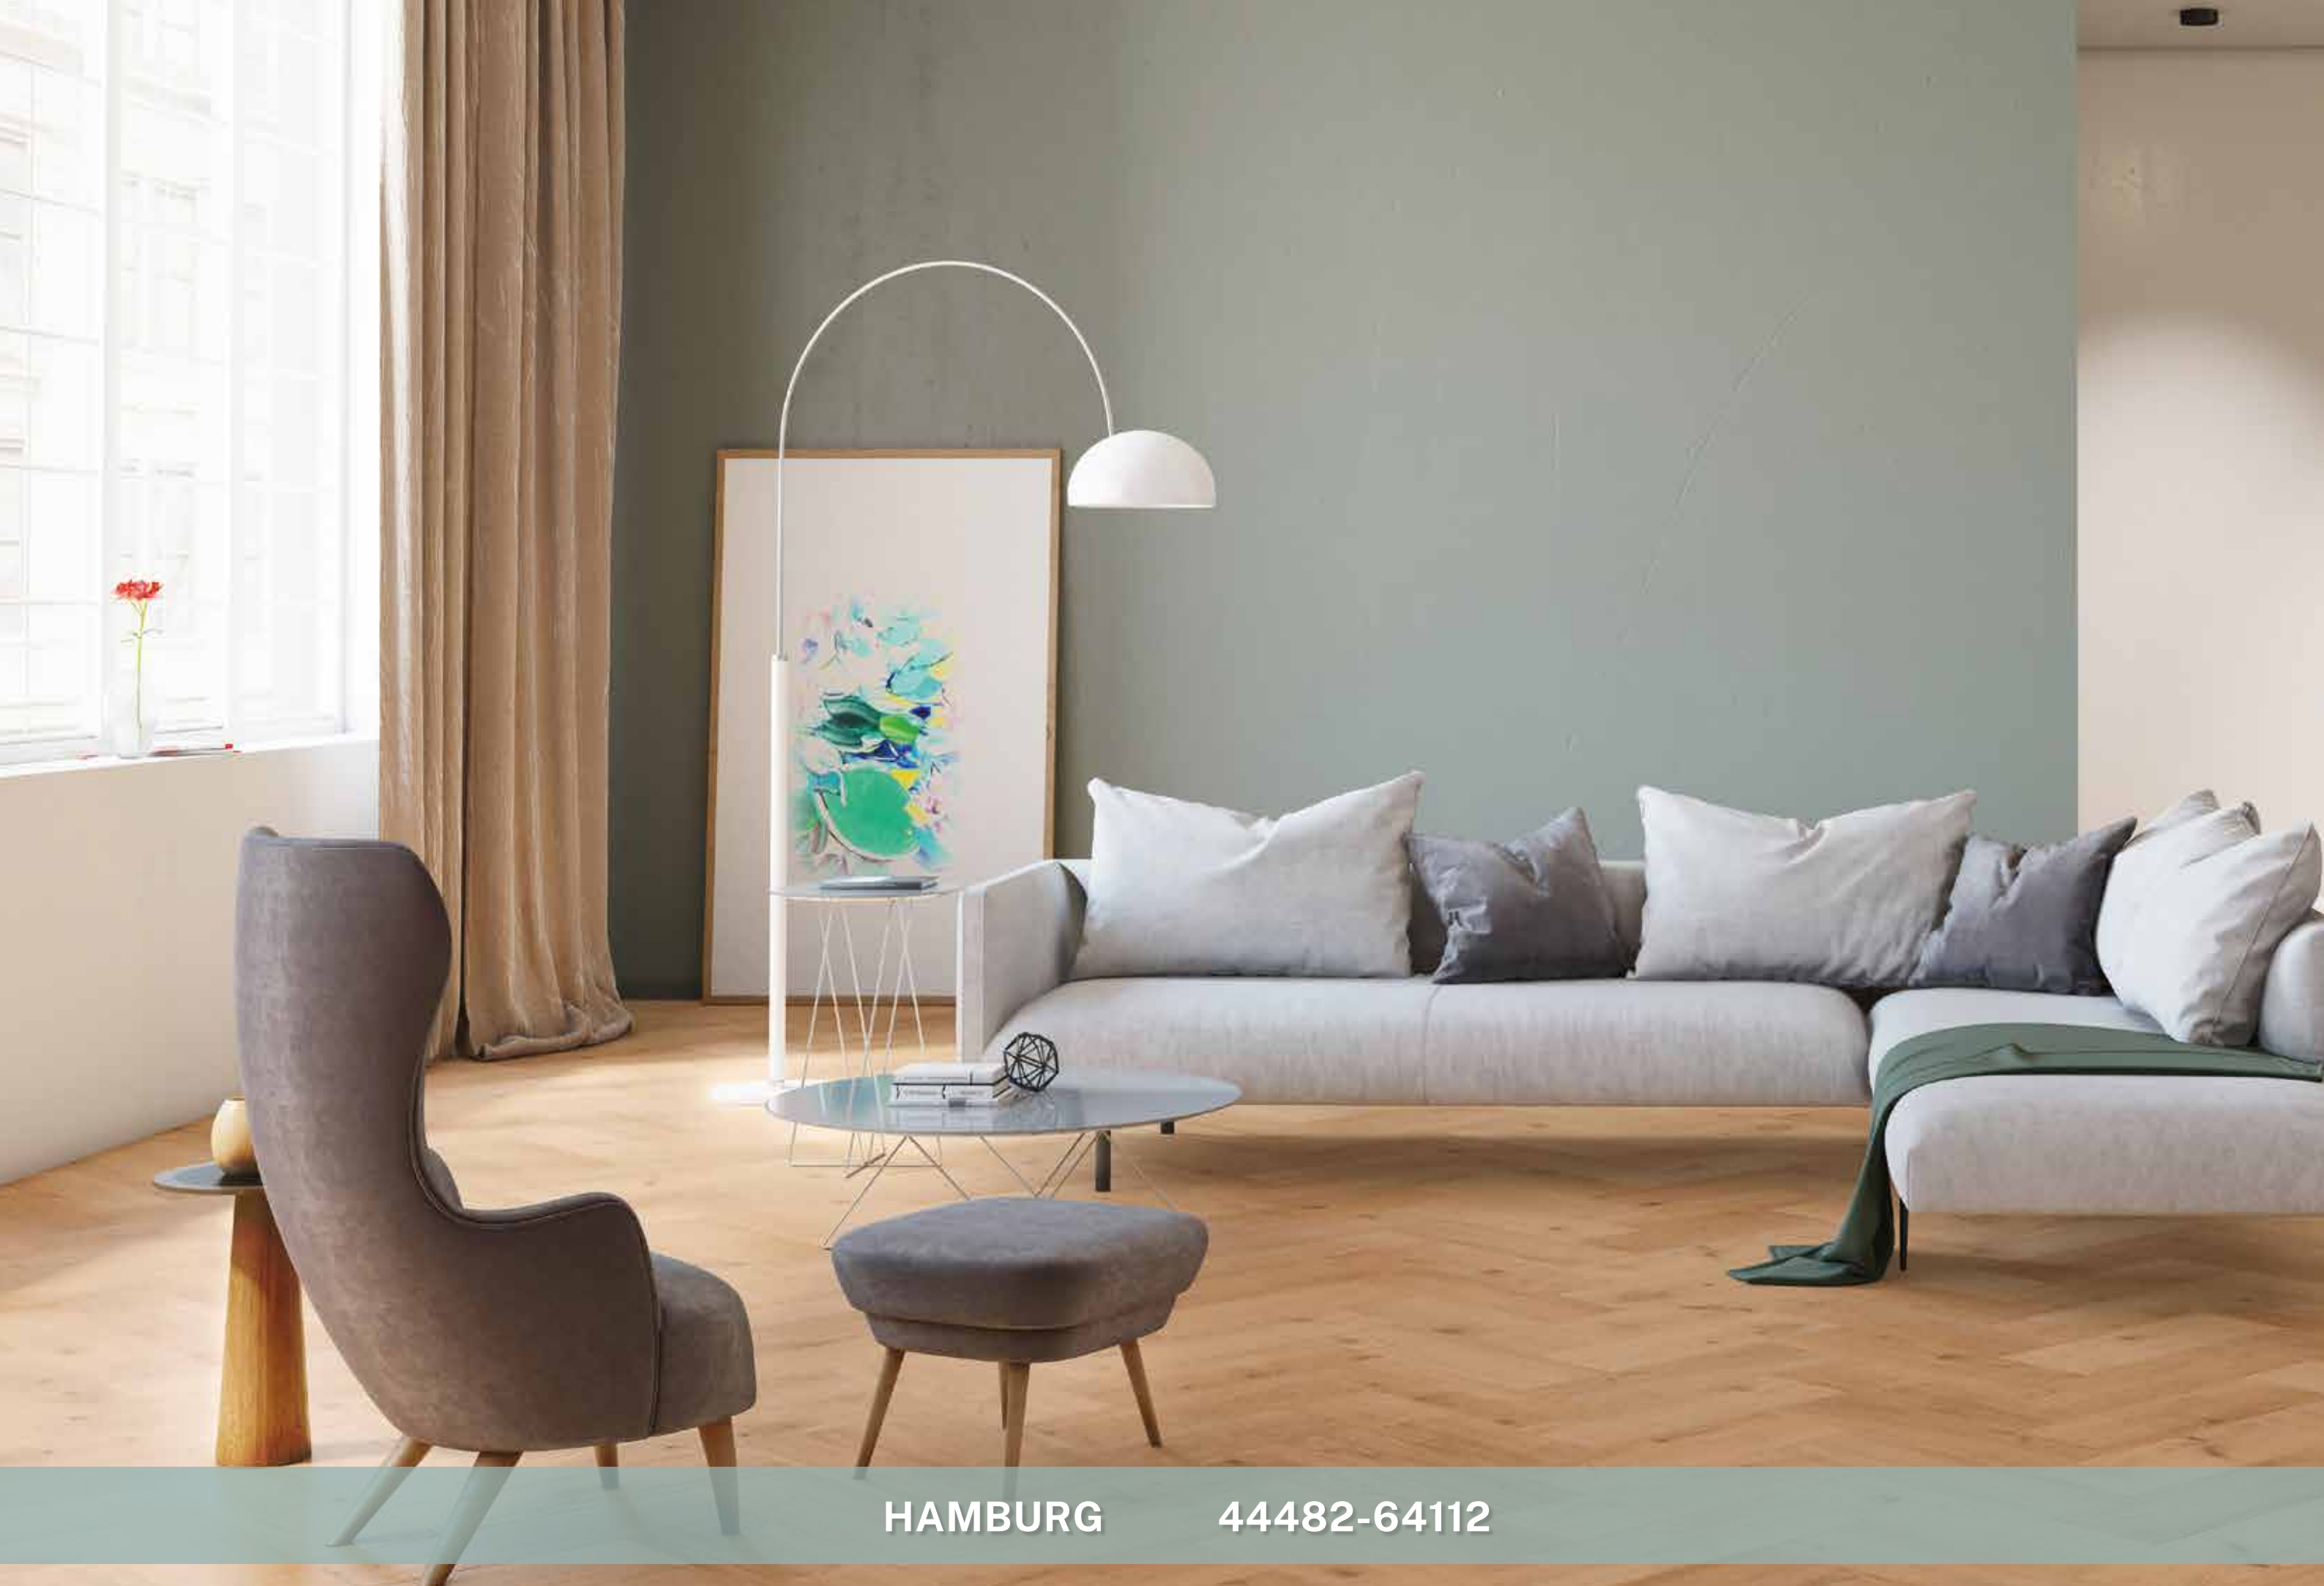

HAMBURG

44482-64112



VALENCIA	VENICE	ROTTERDAM	HAMBURG	GIRONA	NAPLES
44498-63274	44494-63279	44480-64111	44482-64112	44496-65338	44492-66702



Standards

Xpressions 8 Ville Herringbone

CLASSIFICATION

Product Performance	EN 13329	AC-5
European Classification	DIN EN 13329	32

PERFORMANCE

Fire Reaction	EN 13501-1	Cfl-s1
Abrasion Resistance	EN 13329	≥ 6000 cycles
Impact Resistance	EN 17368 EN 13329	small -diameter ball ≥ 35 mm large -diameter ball ≥ 750 mm
Residual Indentation	EN ISO 24343-1	≤ 0.05 mm
Castor Chair Resistance	EN 425	no damage with type W after 25 000 cycles
Furniture Leg Resistance	EN ISO 16581	no damage with type 0
Slip Resistance	EN 13893	DS
Stain Resistance	EN 438-2	Class 5 (group 1 and 2), Class 4 (group 3)
Thermal Conductivity	EN 12667	≥ 0.075 W/mK
Thermal Resistance	EN 12667	R ≤ 0.06 (m²K)/W
Electrostatic Behaviour	EN 1815	≤ 2 kV

ENVIRONMENT

VOC Emissions	ISO 160001-6	A+
Formaldehyde	ISO 16516	E1
Formaldehyde Emissions		US EPA TSCA Title VI / CARB P 2

DESCRIPTION

Product Description	Herringbone Laminate flooring with Megaloc Twin Click-System
Usage Type	Class 32: domestic and moderate commercial use
Guarantee	10 years for heavy domestic use, 5 years for moderate commercial use

CONDITIONING


Xpressions 8 Ville Herringbone box of 14 planks - 643mm x 131mm x 8mm = 1.179m² (96 boxes per pallet)

IMPLEMENTATION - MAINTENANCE TIPS

WWW.LIBERTY-FLOOR.COM

Patented Click System


megaloc
twin



- ① 4 Sided Bevel
- ② Overlapping Bevels
- ③ Durable Force Locking Connection
- ④ Moisture Resistant Joint



Installation Demo





LIBERTY[®]

FLOOR SOLUTIONS

**Wood sourced from
sustainable and
certified forestry**

